


Dimensions and Loads

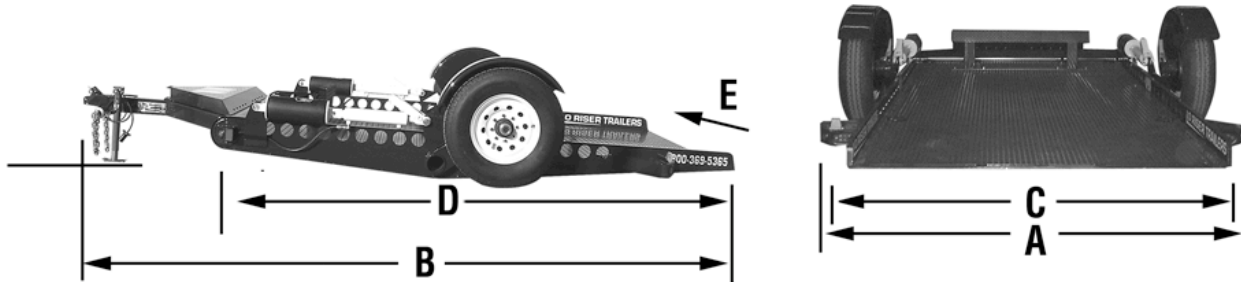

Dimensions:

A = 8' 6" (102")
B = 16' 3" (195")
C = 6' 2" (74")
D = 11' 4" (136")
E = 5 Degree Load Angle
Clearance of deck at transport height = 11.5"

Loads:

400 lbs Tongue Load (Trailer)
550 lbs Tongue Load (Cargo)
950 lbs Total Tongue Load
1025 lbs Wheel Load (Trailer)
2475 lbs Wheel Load (Cargo)
7950 lbs GVWR

Specifications and Features (Base Trailer)

Ground to Travel Height
GVWR 7950 lbs
Payload Maximum 5500 lbs
Trailer Weight 2450 lbs
Tires ST235/80R16LRE
Cylinders 3" Diameter x 12" Stroke
Hitchball 2-5/16" Diameter
Ramp Built-in
Lockable Storage Compartment
Controlled Descent
Star Traction Flooring
Tie Down Rail Built-in

Removable Stop / Brace
DC Electric/Hydraulic Pump
Tongue Jack
Four (4) "D" Rings
Breakaway Kit with Chains
Electric Brakes Both Axles
LED Lighting with 7 Pin Connector
2 Pin +12 VDC and Ground
Control Switch with Cable
HSLA Steel Construction (No Angle or Channel Iron)
Combination Hydraulic/Rubber Suspension

Options

On Board Power – Battery, Charger & Maintainer
Cargo Winch 3300#
Pintle Hitch (2-1/2" Lunette)

Aluminum Wheels
Spare Tire, Wheel & Carrier
Special Paint (True Blue is Standard)