


**Dimensions and Loads**

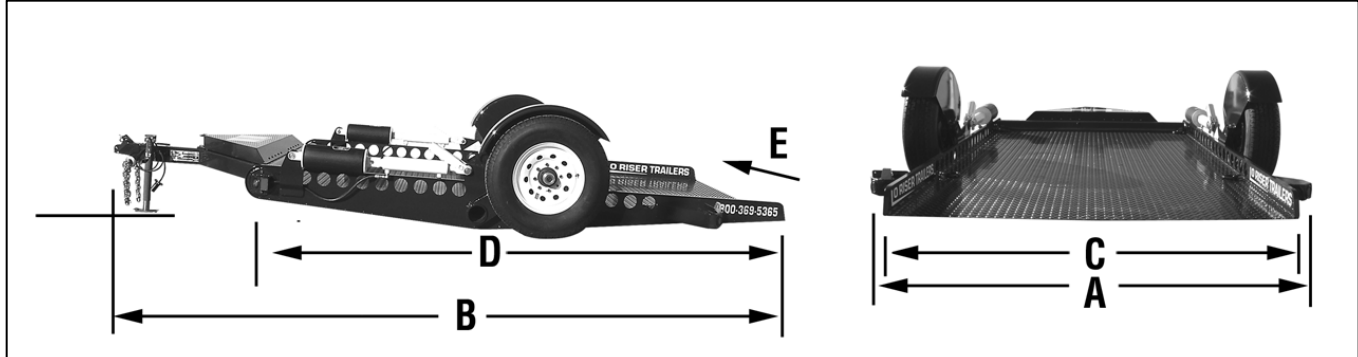

**Dimensions:**

- A = 8' 6" (102")
- B = 18' 6" (222")
- C = 6' 2" (74")
- D = 12' 8" (152")
- E = 4 Degree Load Angle
- Clearance of deck at transport height = 10.7"

**Loads:**

- 425 lbs. Tongue Load (Trailer)
- 1,075 lbs. Tongue Load (Cargo)
- 1,500 lbs. Total Tongue Load
- 1,038 lbs. Wheel Load (Trailer)
- 2,462 lbs. Wheel Load (Cargo)
- 3,500 lbs. Total Wheel Load
- One (1), 7,000 lbs. Axle

**Specifications and Features** (Base Trailer)

- Ground to Travel Height
- GVWR 8,500 lbs.
- Payload Maximum 6,000 lbs.
- Trailer Weight 2,500 lbs.
- 2.5 to 1 Payload to Trailer Weight Ratio
- Tires ST235/80R16LRE (3,500 lbs. Capacity Each) Aluminum Wheels
- Cylinders 3-1/2" Diameter x 12" Stroke
- Adjustable Hitch ball 2-5/16" Diameter
- Ramp Built-in
- Lockable Storage Compartment
- Controlled Descent

- Tie Down Rail Built-in
- DC Electric/Hydraulic Pump
- Tongue Jack
- Four (4) "D" Rings
- Breakaway Kit with Chains
- Electric Brakes
- LED Lighting with 7 Pin Connector
- Single Pin Grounded 12 VDC Power Cable
- Control Switch with Cable
- HSLA Steel Construction (No Angle or Channel Iron)
- Combination Hydraulic/Rubber Suspension

**Options**

On Board Power – includes Battery, Charger & Maintainer .....	12784	Spare Tire, Wheel & Carrier .....	12544
Cargo Winch 4,000 lbs. ....	15424	Special Paint .....	12789
Pintle Hitch (2-1/2" Lunette) .....	12782	(Yellow Standard)	
Remote Power Option.....	12783		
(Cord in addition to On Board Power)			