

Lift-A-Load Elevating Platform Trailer

Hydraulic Operated - Ground-Level Loading up to 52" Dock Height



Ground & Dock Loading

for Safe, Fast, and Easy equipment deliveries

- Dependable hydraulic system gently lowers deck for ground level loading, and raises the deck to any dock height (up to 52") for fast, easy, and safe equipment unloading and loading.
- Tailgate/Ramp is operated by a winch to eliminate manual lifting and provide load angles between 6.5 and 9.5 degrees.
- Increase operator safety and reduce delivery times.
- Level loading at either ground level or dock height increases safety and avoids equipment damage.
- Trailer deck remains level at all times so payload safely stays in-place until secured for transportation.
- Ideal for handling scissor lifts, forklifts, floor scrubbers & sweepers, order pickers, pallet jacks, compactors, and static loads like safes – To name a few.

EXPEDITE
deliveries and
INCREASE safety

Level loading from the ground, up to 52" Docks



| Lift-A-Load Models | Payload Capacity | GVWR | Trailer Weight | Total Length | Deck Length | Deck Width | Number of Wheels |
|--------------------|------------------|-------------|----------------|--------------|-------------|------------|------------------|
| EPT2-212 | 4,400 lbs. | 7,200 lbs. | 2,800 lbs. | 22' 3" | 12' | 5' 10" | 2 |
| EPT4-314 | 7,500 lbs. | 11,500 lbs. | 4,000 lbs. | 24' 6" | 14' | 5' 8" | 4 |
| EPT4-514 | 10,000 lbs. | 14,600 lbs. | 4,600 lbs. | 24' 6" | 14' | 5' 8" | 4 |
| EPT4-715 | 15,000 lbs. | 21,160 lbs. | 6,160 lbs. | 25' 8" | 15' | 5' 2" | 4 |

LIFT-A-LOAD
ELEVATING PLATFORM TRAILERS™

standard features



Adjustable Coupler

4 position coupler/ball hitch accommodates a variety of tow vehicle – Assuring a level trailer.



4-Degree Loading

No crown and a 4-degree loading angle (Lo Riser) allows easy loading of all low-ground clearance, and minimal ramp climbing-capable, equipment – Safely and quickly.

optional equipment




Winch

4,000 or 8,000 lb., 12V winch and mount is available to assist loading.



Construction

High Strength Low Alloy Steel (Lo Riser) for durability and assurance that the decking will not bow/sag over time. It also provides the best payload to trailer weight ratio - allowing more load capacity per GVWR.

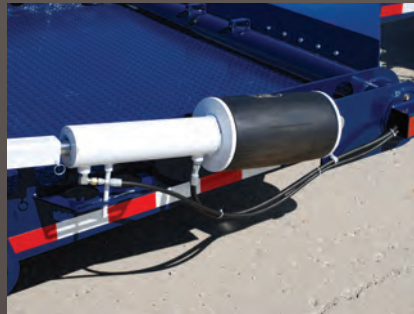

Suspension System

Unique Rubber Suspension systems absorb the energy from bumps and uneven roads to provide better control and a smoother ride than conventional trailers. Reducing travel stress on the tow vehicle & operator, trailer, and payload.



On-Board Power

(battery, charger, and maintainer) eliminates the need for a special connection to the tow vehicle for trailer operation. (Lo Riser Model Shown)



2 Year Limited Warranty -

New products manufactured by Four Degree Trailer Company, are warranted against defects in materials and workmanship for two (2) years from the date of original purchase, when used as intended under normal operating conditions.

Visit www.fourdegreetrailer.com/warranty for more information.



Spare Tire & Mounting Bracket



Four Degree
Trailer Company
3726 US Hwy 34
Kewanee, IL 61443

800-369-5365
info@fourdegreetrailer.com
www.fourdegreetrailer.com

A subsidiary of Rhino Tool Company