


Dimensions and Loads

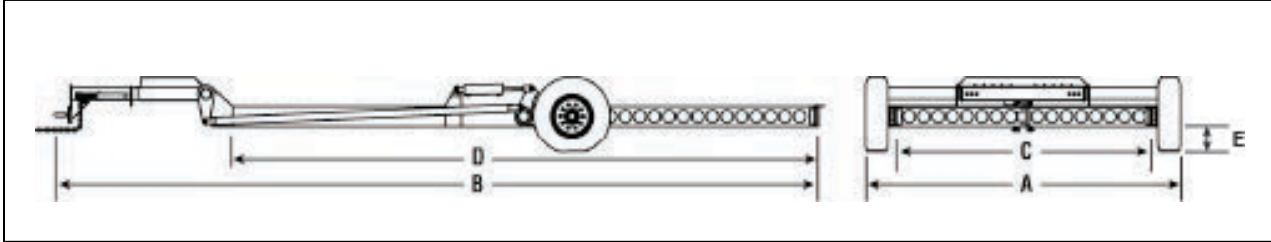

Dimensions:

- A** 10' 10" (3302 mm) Total Width
- B** 26' 0" (7925 mm) Total Length
- C** 8' 7" (2616 mm) Deck Width
- D** 20' 0" (6096 mm) Deck Length
- E** 11' 0" (279 mm) Deck clearance at transport height

Loads:

- 4,000 lb. (1814 kg) Payload Capacity
- 4,020 lb. (1824 kg) Trailer Weight
- 8,020 lb. (3638 kg) GVWR
- 1,480 lb. (671 kg) Total Tongue Load

Specifications and Features (Base Trailer)

- | | |
|---|--|
| <ul style="list-style-type: none"> On-board Hydraulics to Move Trailer Deck from Travel Height, to Ground Level for Loading Tires ST235/80R16LRE (3500 lbs Capacity Each) 2 1/2" (63.5 mm) Bore by 10" Stroke Hydraulic Cylinders 2-1/2" (63.5 mm) Lunette Eye (Pintle) Hitch Ground Level Loading - Trailer Deck at a 3-Degree Loading Angle Lockable Cover to Protect Hydraulics, Battery, and Battery Maintainer 110 Volt, 10-Amp Battery Maintainer On-Board 12-Volt Battery 110 Volt Battery Maintainer 4000 lb (1814 kg) Line Pull Cargo Winch Spare Tire and Mounting Bracket | <ul style="list-style-type: none"> 7-Watt Solar Battery Charger Built-in Tie-down Rails Six "D" Ring Tie-Downs Tongue Jack Safety Chains 7K (3179 kg) Rated Axles and Wheels Rear Gate with Locking-Pin Hydraulic Controls on a 10' (3048 mm) Extension Cord HSLA Steel Construction Cargo Winch Hydraulic Suspension Primed and Painted Air Force Grey |
|---|--|

Note

This trailer is specifically designed to carry aircraft wing jacks only.
Maximum speed 15 mph. Trailer does not include lights, fenders or brakes and, therefore, is not intended for over the road use.

Price (retail)FOB Kewanee, IL By Request