# fourdegreetrailer.com

## Lift-A-Load EPT4-316 Trailer

**Ground Level and Dock Height Loading/Unloading** 





## **Features**

Level Loading up to 52" Dock Height

Rubber over Hydraulic Suspension

Minimal loading angle with integrated ramp


2-Year Warranty

The Lift-A-Load Trailer Deck remains level at all heights between ground level or dock height, for safe, easy loading and expedited delivery of low ground clearance and static loads.



**Dock Level Loading** 



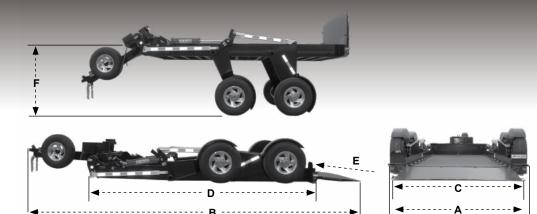

#### EPT4-316 - Part No. 17005

(A) Overall Width	(B) Overall Length	(C) Usable Deck Width	(D) Usable Deck Length	(E) Load Angle*	(F) Deck Height (Fully Raised)
102" (259 cm)	318" (808 cm)	74" (188 cm)	192" (488 cm)	6.5°	52" (132.08 cm)

\*No load angle at dock height

#### Loads & Weights:

•	Payload Capacity	7,500 lbs	(3,402	kg)
•	GVWR	11,868 lbs	(5,383	kg)
•	Trailer Weight	4,368 lbs	(1,981	kg)
•	Load per axle	6,000 lbs	(2,721	kg)
•	Hitch (standard) Load	2,198 lbs	(997	kg)

#### **Trailer Frame:**

- Frame (side) Rails are 3/16" (4.6 mm) ASTM 500 Grade B
- Side Rails utilize distinctive shapes for unlimited tiedown locations
- Framework (crossmembers) constructed of ASTM A36 Steel Plates - Formed to a 1.5" x 4" (38 x 102 mm) "L" Shape for maximum strength with minimum weight
- Crossmembers are spaced on 12" (305 mm) centers for maximum strength – Preventing deck warping
- 3/16" (4.8 mm) Diamond Plate (Grade 55) Decking Added strength and a non-slip surface

### **Electrical:**

- · LED Lighting with Dedicated Ground Circuit
- 7-Pin Round RV Connector
- · Electric Brakes on all Axles

#### Misc.:

- On Board Power (Hyd. Pump, Battery, & 10 Amp Charger-Maintainer)
- Tires are ST235/80R/16LRE / 10 Ply / Rated 3,520 lbs @ 80 PSI @ 75 MPH

### **Options:**

- Spare Tire and Carrier
- Special Paint Color (Black, Blue, and Yellow are standard colors)
- 8,000 lb (3,629 kg) Cargo Winch
- · Extra D-Ring / Tie Downs
- E-Track Package (48" Height)
- · Star Track Decking
- · Aluminum Wheels
- Solar Battery Charger
- · Steel Side Boards with Built-In Tie Downs

Specifications may change without prior notice.



www.fourdegreetrailer.com | info@fourdegreetrailer.com

## **Four Degree Trailer Company**

3726 US Hwy 34 | Kewanee, IL 61443 Toll-Free: 1-800-369-5365

A division of Triple L Group, LLC





