

Lo-Riser IPT2-312 Trailer

Ground Level Loading to Travel Height




Shown with additional accessories





Features

- 4° Load Angle – No Ramps or Crowns
- Rubber over Hydraulic Suspension
- Safe, Simple, Swift, & Secure Loading /Unloading
- 2-Year Warranty

Lo-Riser IPT2-312 Trailer shown **below** in down-position for loading. A mere 3/16" lip allows any rolling load to be easily pushed on or off the trailer deck. Nearly 1/2 of the trailer's framework rests on the ground for loading, supporting the weight of the payload and the additional weight of the forklift used for loading.

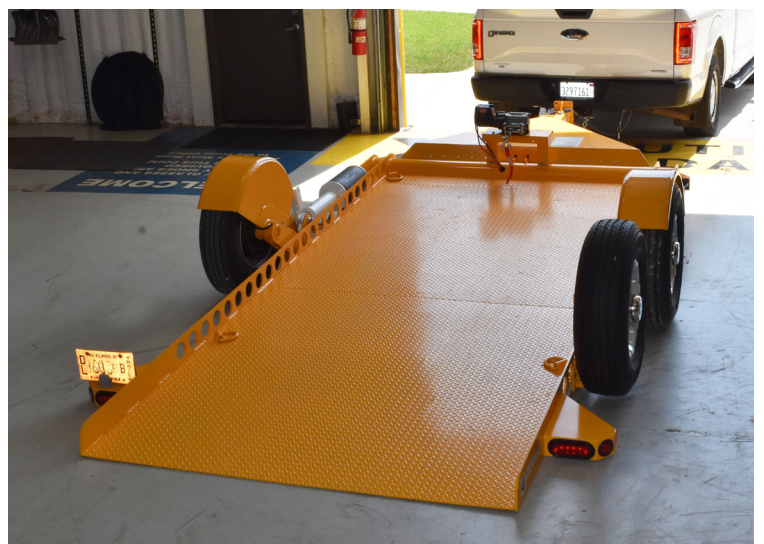

LO-RISER 4° INCLINING TRAILER

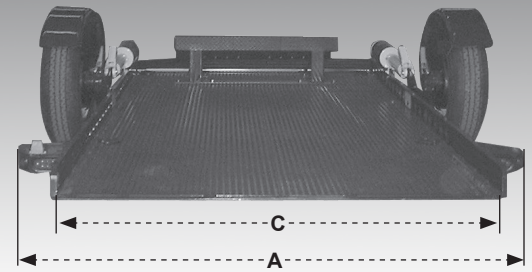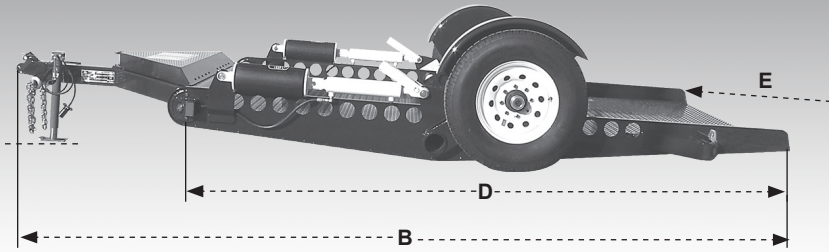

IPT2-312 - Part No. 15400

(A) Overall Width	(B) Overall Length	(C) Usable Deck Width	(D) Usable Deck Length	(E) Load Angle	Deck Height Typical
102" (259.1 cm)	222" (564 cm)	74" (187.96 cm)	152" (386 cm)	4°	18.25" (46.4 cm)

Loads & Weights:

- Payload Capacity 6,000 lbs (2,721 kg)
- GVWR 8,565 lbs (3,885 kg)
- Trailer Weight 2,565 lbs (1,163 kg)
- Load per axle 7,000 lbs (3,175 kg)
- Hitch (standard) Load 1,565 lbs (710 kg)

Trailer Frame:

- Frame (side) Rails are 3/8" (9.5 mm) Thick x 12" (305 mm) High (tapered at the rear end)
- Side Rails utilize distinctive shapes for unlimited tie-down locations
- Framework (cross-members) constructed of Grade 80, HSLA (high-strength low-alloy) Steel Plates - Formed to a 1.5" x 4" (38 x 102 mm) "L" Shape for maximum strength with minimum weight
- Cross-members are spaced on 10" (254 mm) centers for maximum strength – Preventing deck warping
- 3/16" (4.8 mm) Diamond Plate (Grade 55) Decking – Added strength and a non-slip surface

Electrical:

- LED Lighting with Dedicated Ground Circuit
- 7-Pin Round RV Connector
- Electric Brakes on all Axles

Misc.:

- On Board Power (Hyd. Pump, Battery, & 10 Amp Charger-Maintainer)
- Tires are ST235/80R/16LRE / 10 Ply / Rated 3,520 lbs @ 80 PSI @ 75 MPH

Options:

- Spare Tire and Carrier
- Special Paint Color (Black, Blue, and Yellow are standard colors)
- Cargo Winch 4,000 lbs (1814 kg)
- Pintle Hitch
- Extra D-Ring, Per Tie Down
- E-Track Package (48")
- Star Track Decking
- Aluminum Wheels
- Solar Battery Charger

Specifications may change without prior notice.



www.fourdegreetrailer.com | info@fourdegreetrailer.com

Four Degree Trailer Company

3726 US Hwy 34 | Kewanee, IL 61443

Toll-Free: 1-800-369-5365

A division of Triple L Group, LLC



Scan QR for Videos



Form IPT2-312_04/05/24