

# Lo-Riser IPT4-516 Trailer

Ground Level Loading to Travel Height



*Shown with additional accessories*




## Features

- 4° Load Angle – No Ramps or Crowns
- Rubber over Hydraulic Suspension
- Safe, Simple, Swift, & Secure Loading /Unloading
- 2-Year Warranty

Lo-Riser IPT4-516 Trailer shown **below** at travel height. A mere 3/16" lip allows any rolling load to be easily pushed on or off the trailer deck. Nearly 1/2 of the trailer's framework rests on the ground for loading, supporting the weight of the payload and the additional weight of the forklift used for loading.



# LO-RISER 4° INCLINING TRAILER

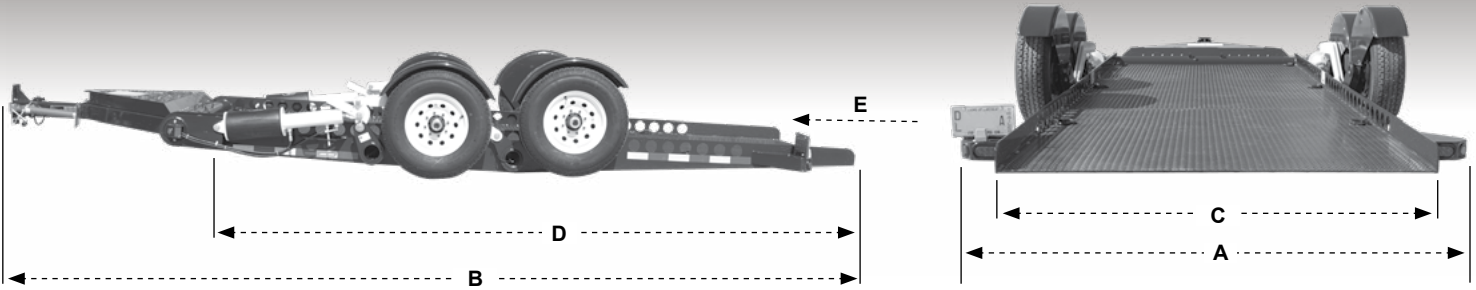

**IPT4-516 - Part No. 12700**

(A) Overall Width	(B) Overall Length	(C) Usable Deck Width	(D) Usable Deck Length	(E) Load Angle	Deck Height Typical
102" (259 cm)	265" (673 cm)	74" (188 cm)	192" (487.7 cm)	4°	18.25" (46.4 cm)

### Loads & Weights:

- Payload Capacity..... 10,000 lbs (4,536 kg)
- GVWR ..... 13,565 lbs (6,153 kg)
- Trailer Weight ..... 3,565 lbs (1,617 kg)
- Load per axle..... 6,000 lbs (2,722 kg)
- Total Two-Axle Load ..... 12,000 lbs (5,443 kg)
- Hitch (standard) Load ..... 2,468 lbs (1,119 kg)

### Trailer Frame:

- Frame (side) Rails are 3/8" (9.5 mm) Thick x 12" (305 mm) High (tapered at the rear end)
- Side Rails utilize distinctive shapes for unlimited tie-down locations
- Framework (cross-members) constructed of Grade 80, HSLA (high-strength low-alloy) Steel Plates - Formed to a 1.5" x 4" (38 x 102 mm) "L" Shape for maximum strength with minimum weight
- Cross-members are spaced on 10" (254 mm) centers for maximum strength – Preventing deck warping
- 3/16" (4.8 mm) Diamond Plate (Grade 55) Decking – Added strength and a non-slip surface

### Electrical:

- LED Lighting with Dedicated Ground Circuit
- 7-Pin Round RV Connector
- Electric Brakes on all Axles

### Misc.:

- On Board Power (Hyd. Pump, Battery, & 10 Amp Charger-Maintainer)
- Tires are ST235 / 80R / 16LRE/ 10 Ply / Rated 3,520 lbs @ 80 PSI @ 75 MPH

### Options:

- Spare Tire and Carrier
- Special Paint Color (Black, Blue, and Yellow are standard colors)
- 8,000 lb (3,629 kg) Cargo Winch
- Extra D-Ring, Per Tie Down
- E-Track Package (48")
- Star Track Decking
- Aluminum Wheels
- Solar Battery Charger
- Pintle Hitch 2 1/2"

Specifications may change without prior notice.



[www.fourdegreetrailer.com](http://www.fourdegreetrailer.com) | [info@fourdegreetrailer.com](mailto:info@fourdegreetrailer.com)

### Four Degree Trailer Company

3726 US Hwy 34 | Kewanee, IL 61443

Toll-Free: 1-800-369-5365

A division of Triple L Group, LLC



Scan QR for Videos



Form IPT4-516\_04/05/24