fourdegreetrailer.com

Lift-A-Load EPT4-716 Trailer

Ground Level and Dock Height Loading/Unloading





produid zoror zodding


The Lift-A-Load Trailer Deck remains level at all heights between ground level or dock height, for safe, easy loading and expedited delivery of low ground clearance and static loads.

Transport Level

Features

- Level Loading up to 52"
 Dock Height
- Rubber over Hydraulic Suspension
- Minimal loading angle with integrated ramp
- 2-Year Warranty



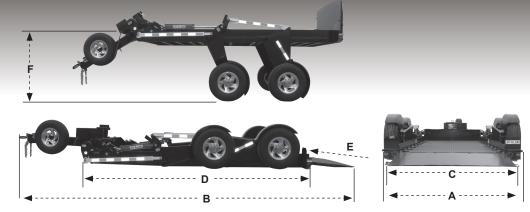

EPT4-716 - Part No. 17007

(A) Overall Width	(B) Overall Length	(C) Usable Deck Width	(D) Usable Deck Length	(E) Load Angle*	(F) Deck Height (Fully Raised)
102" (259 cm)	320" (813 cm)	68" (173 cm)	192" (488 cm)	9.5°	52" (132.08 cm)

*No load angle at dock height

Loads & Weights:

- Payload Capacity 15,000 lbs (6,804 kg)
- GVWR 21,412 lbs (9,712 kg)
- Trailer Weight 6,412 lbs (2,908 kg)
- Load per axle 9,000 lbs (4,082 kg)
- Pintle Hitch (standard) Load..... 3,800 lbs (1,724 kg)

Trailer Frame:

- Frame (side) Rails are 3/16" (4.6 mm) ASTM 500 Grade B
- Side Rails utilize distinctive shapes for unlimited tiedown locations
- Framework (crossmembers) constructed of ASTM A36 Steel Plates - Formed to a 1.5" x 4" (38 x 102 mm) "L" Shape for maximum strength with minimum weight
- Crossmembers are spaced on 12" (305 mm) centers for maximum strength Preventing deck warping
- 3/16" (4.8 mm) Diamond Plate (Grade 55) Decking Added strength and a non-slip surface

Electrical:

- LED Lighting with Dedicated Ground Circuit
- 7-Pin Round RV Connector
- · Electric Brakes on all Axles

Misc.:

- On Board Power (Hyd. Pump, Battery, & 10 Amp Charger-Maintainer)
- Tires are 215/75R/17.5H / 16 Ply / Rated 4,805 lbs @ 125 PSI @ 75 MPH

Options:

- Spare Tire and Carrier
- Special Paint Color (Black, Blue, and Yellow are standard colors)
- 8,000 lb (3,629 kg) Cargo Winch
- Extra D-Ring / Tie Downs
- E-Track Package (48" Height)
- · Star Track Decking
- Solar Battery Charger
- Steel Side Boards with Built-In Tie Downs

Specifications may change without prior notice.



www.fourdegreetrailer.com | info@fourdegreetrailer.com

Four Degree Trailer Company

3726 US Hwy 34 | Kewanee, IL 61443 Toll-Free: 1-800-369-5365

A division of Triple L Group, LLC







Scan QR for Videos

Form EPT4-716_04/05/24